

TEGRA SERİSİ

ESL (Electronic Shelf Labels)
KATALOĐU

#MobisisTeknoloji




ESL-TG213-2R

TEGRA SERİSİ 2.13" 2 RENK ESL



Product model

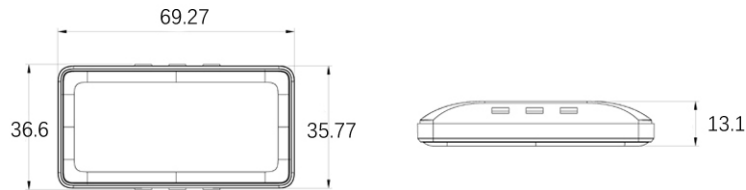

SPECIFICATIONS


Product code	Unit	TG213-2R
Dimensions	mm	69.3*35.8mm
Active display area	mm	48.5*23.7mm
Resolution	pixel	250x122
Pixel density	DPI	130
Display color	-	B/W
Battery	-	2xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG213-3R

TEGRA SERİSİ 2.13" 3 RENK ESL



Product model

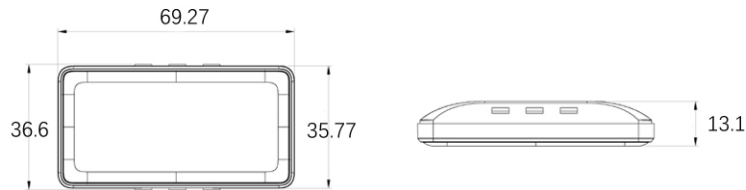


SPECIFICATIONS



Product code	Unit	TG213-3R
Dimensions	mm	69.3*35.8mm
Active display area	mm	48.5*23.7mm
Resolution	pixel	250x122
Pixel density	DPI	130
Display color	-	B/W/R
Battery	-	2xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG213-FR

TEGRA SERİSİ 2.13" FROZEN ESL

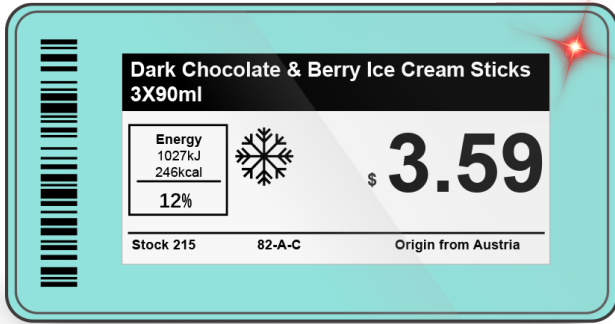

Product model

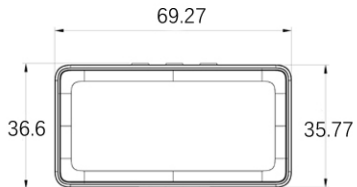

SPECIFICATIONS


Product code	unit	TG213-FR
Dimensions	mm	69.3*35.8mm
Active display area	mm	48.5*23.7mm
Resolution	pixel	250x122
Pixel density	DPI	
Display color	-	B/W
Battery	-	2xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	-25~25°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG266-3R

TEGRA SERİSİ 2.66" 3 RENK ESL



Product model

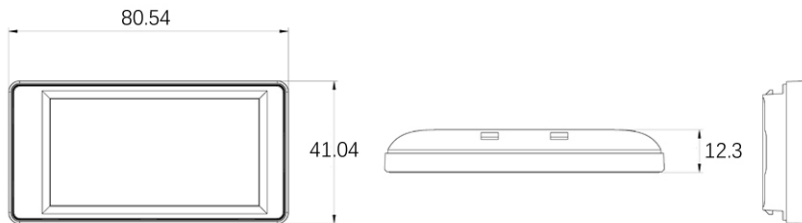

SPECIFICATIONS


Product code	unit	TG266-3R
Dimensions	mm	80.5*41.1mm
Active display area	mm	60.0*30.7mm
Resolution	pixel	296x152
Pixel density	DPI	125
Display color	-	B/W,B/W/R
Battery	-	2xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG266-4R

TEGRA SERİSİ 2.66" 4 RENK ESL



Product model

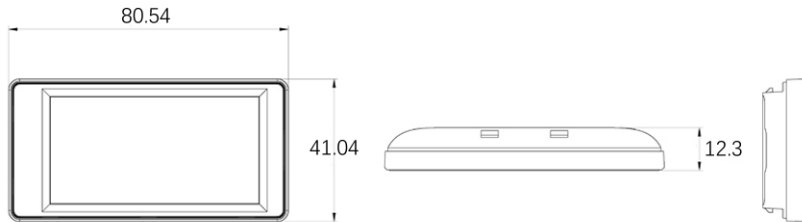

SPECIFICATIONS


Product code	unit	TG266-3R
Dimensions	mm	80.5*41.1mm
Active display area	mm	60.0*30.7mm
Resolution	pixel	296x152
Pixel density	DPI	125
Display color	-	B/W,B/W/R,B/W/Y
Battery	-	2xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG290-3R

TEGRA SERİSİ 2.9" 3 RENK ESL



Product model

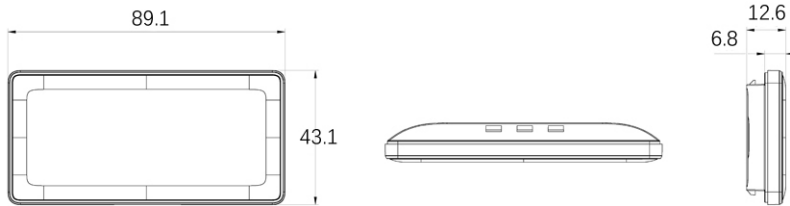

SPECIFICATIONS


Product code	unit	TG290-3R
Dimensions	mm	89.1*43.1mm
Active display area	mm	66.9*29.0mm
Resolution	pixel	296x128
Pixel density	DPI	112
Display color	-	B/W,B/W/R
Battery	-	2xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG290-4R

TEGRA SERİSİ 2.9" 4 RENK ESL



Product model

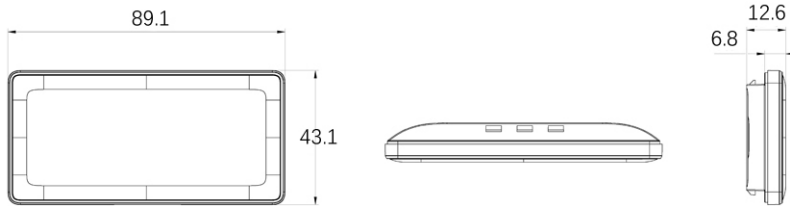

SPECIFICATIONS


Product code	unit	TG290-4R
Dimensions	mm	89.1*43.1mm
Active display area	mm	66.9*29.0mm
Resolution	pixel	296x128
Pixel density	DPI	112
Display color	-	B/W,B/W/R,B/W/Y
Battery	-	2xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG350-3R

TEGRA SERİSİ 3.5" 3 RENK ESL



Product model

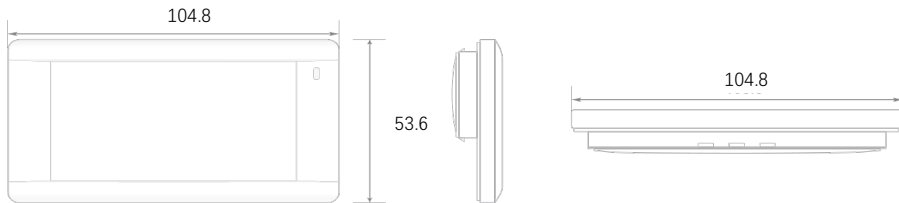

SPECIFICATIONS


Product code	unit	TG350-3R
Dimensions	mm	104.8*53.6mm
Active display area	mm	79.68*38.18mm
Resolution	pixel	384x184
Pixel density	DPI	122
Display color	-	B/W,B/W/R
Battery	-	3xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG350-4R

TEGRA SERİSİ 3.5" 4 RENK ESL



Product model

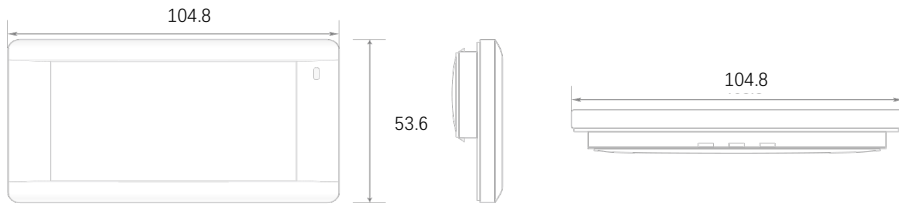

SPECIFICATIONS


Product code	unit	TG350-4R
Dimensions	mm	104.8*53.6mm
Active display area	mm	79.68*38.18mm
Resolution	pixel	384x184
Pixel density	DPI	122
Display color	-	B/W,B/W/R,B/W/Y
Battery	-	3xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG420-3R

TEGRA SERİSİ 4.2" 3 RENK ESL



Product model

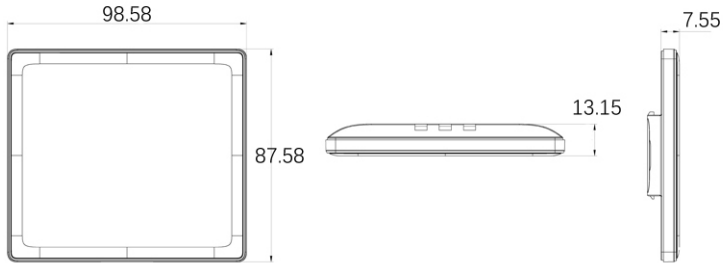

SPECIFICATIONS


Product code	unit	TG420-3R
Dimensions	mm	98.6*87.6mm
Active display area	mm	84.8*63.6mm
Resolution	pixel	400x300
Pixel density	DPI	120
Display color	-	B/W,B/W/R
Battery	-	3xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG420-4R

TEGRA SERİSİ 4.2" 4 RENK ESL



Product model

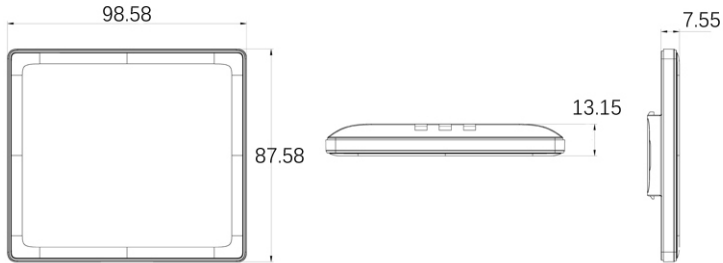

SPECIFICATIONS


Product code	unit	TG420-4R
Dimensions	mm	98.6*87.6mm
Active display area	mm	84.8*63.6mm
Resolution	pixel	400x300
Pixel density	DPI	120
Display color	-	B/W,B/W/R,B/W/Y
Battery	-	3xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG583-3R

TEGRA SERİSİ 5.83" 3 RENK ESL



Product model

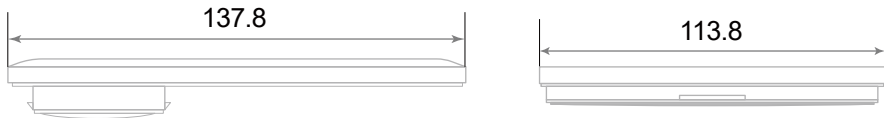

SPECIFICATIONS


Product code	unit	TG583-3R
Dimensions	mm	137.8*113.8mm
Active display area	mm	118.7*88.2mm
Resolution	pixel	648x480
Pixel density	DPI	138
Display color	-	B/W,B/W/R
Battery	-	3xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG583-4R

TEGRA SERİSİ 5.83" 4 RENK ESL



Product model

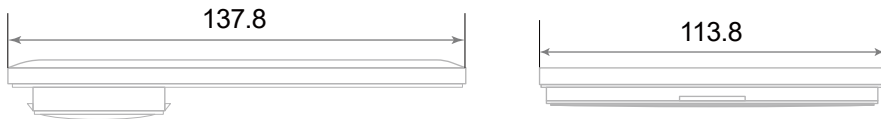


SPECIFICATIONS


Product code	unit	TG583-4R
Dimensions	mm	137.8*113.8mm
Active display area	mm	118.7*88.2mm
Resolution	pixel	648x480
Pixel density	DPI	138
Display color	-	B/W,B/W/R,B/W/Y
Battery	-	3xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	7 Colors
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available

ESL-TG1020-4R

TEGRA SERİSİ 10.2" 4 RENK ESL

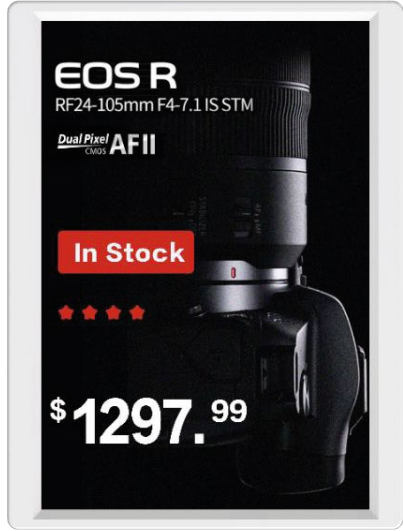

Product model

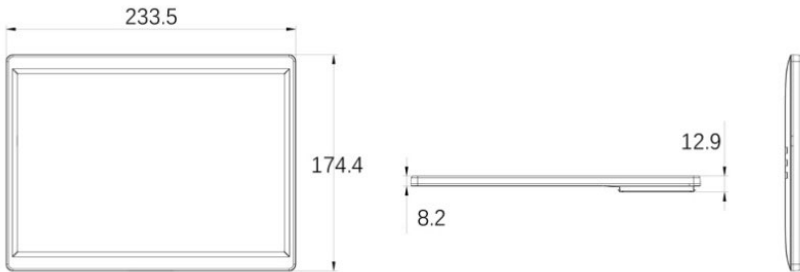

SPECIFICATIONS

Product code	unit	TG1020-4R
Dimensions	mm	233.5*174.4mm
Active display area	mm	215.5*143.7mm
Resolution	pixel	960x640
Pixel density	DPI	113
Display color	-	B/W,B/W/R,B/W/Y
Battery	-	6xCR2450
Battery life	-	8 years (4 update/day)
Working temperature	-	0~40°C
LED	-	N/A
NFC	-	For option
ESL operating frequency	-	2405~2480Hz
Wireless firmware update	-	Available